



Food processing and
packaging equipment

VACUUM PACKAGING MACHINES

Double Chamber Models

420A / 600A / 620A / 650A / 680A / 700A

Heavy-duty

This high-quality, user-friendly, and easy to clean machine integrates heavy-duty parts, thereby providing great reliability.

High performance

Productivity is twice increased with the double chambers that eliminate waiting times.

Efficiency

This model is designed to package large volumes of oversized products. The modified atmosphere packaging (MAP) option helps extend the shelf-life of food products and eliminates preservatives. A selection of pumps is offered (optional).




Why should you vacuum pack?

- To reduce spoilage by removing air from the package, resulting in much longer shelf life;
- To prevent dehydration;
- For ease of handling;
- To slow down oxidation;
- To protect against external contamination.

Seal bars


2 seal bars/chambers

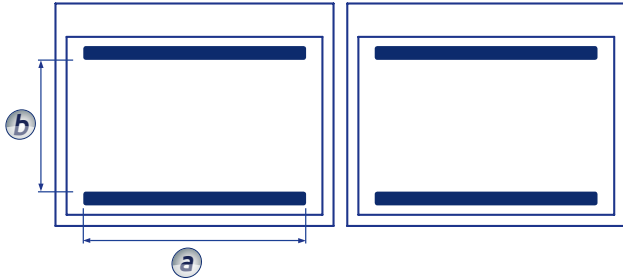

Model 700A



Machine dimensions

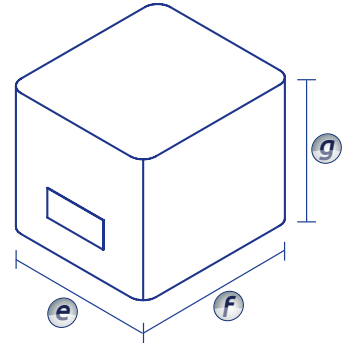

DOUBLE CHAMBER MODELS			420A	600A	620A	650A	680A	700A
SEAL BARS	Length	A	17" / 436 mm	25.25" / 642 mm	26" / 664 mm	33.5" / 855 mm	33.5" / 855 mm	33.5" / 855 mm
	Quantity		4	4	4	4	4	4
	Distance between	B	17.5" / 445 mm	22.5" / 572 mm	28" / 711 mm	31" / 787 mm	31" / 787 mm	31" / 787 mm
CHAMBER DIMENSIONS	Height		8" / 203 mm	8" / 203 mm	8" / 203 mm	8" / 203 mm	8" / 203 mm	8" / 203 mm
BUSCH PUMP	Std. / Option		40 m ³ 2.0 HP	100 m ³ 5.0 HP	100 m ³ 5.0 HP	165 m ³ 7.5 HP	165 m ³ 7.5 HP	165 m ³ 7.5 HP
MACHINE DIMENSIONS	Width	E	52" / 1,321 mm	68" / 1,727 mm	68" / 1,727 mm	85" / 2,159 mm	85" / 2,159 mm	85" / 2,159 mm
	Depth	F	31" / 787 mm	36" / 914 mm	39.5" / 1003 mm	49" / 1,245 mm	49" / 1,245 mm	45" / 1,145 mm
	Height	G	43" / 1,092 mm	47" / 1,194 mm	47" / 1,194 mm	47" / 1,194 mm	47" / 1,194 mm	51" / 1,295 mm
POWER SUPPLY			208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz
MICROPROCESSOR			MC-40	MC-40	MC-40	MC-40	MC-40	MC-40

Basic Features:

- Stainless steel construction
- Vacuum sensor
- Twin seal element
- Automatic vacuum chamber movement (Models 680A and 700A)
- Automated conveyor system for unloading products (Model 700A)
- Rear panel
- ETL, CSA, UL certification
- Filler plates

Optional Features:

(Available on selected models)

- 12" (305 mm) chamber available
- Electric cut-off
- Gas injection system (MAP)
- Air regulator – Regulated air pressure in the seal bars bladders with compressed air
- Adjustable venting system
- Selection of vacuum chamber configurations offered (except model 420A)
- Top and bottom sealing system (except model 420A)
- Mechanized bag cutter (models 650A, 680A and 700A)
- Rear conveyor (model 700A)
Dimensions: 18" x 96" (458 mm x 2,438 mm)
- Selection of vacuum pump configurations offered
- Multiple supply voltage available

All features are subject to change without notice.

MC-40



Check out our other products
by visiting our website:
www.sipromac.com

Phone: 819 395-5151 | **Toll Free:** 1 855 395-5252 Canada/U.S.
Email: sipromac@sipromac.com
240, boulevard Industriel, Saint-Germain-de-Grantham QC, Canada J0C 1K0

