



Food processing and packaging equipment

# VACUUM PACKAGING MACHINES

## Table Top Models

250 / 300 / 300D / 350 / 350D / 380 / 380T

### Robust

This stainless steel product features quality components, including the highly reliable Busch pump.

### Easy to Use

The machine's digital display and diagnostics option make it easy to use. Only two steps are required!


### Certified

The Sipromac vacuum packaging machines are ETL LISTED, CSA certified and conform to UL STD. It was designed for easy cleaning and to meet the industry's highest hygiene and food safety standards.

### Flexible Solutions

Sipromac offers packaging solutions for the following sectors:

- a **food** (meat, poultry, fish, cheese, etc.)
- b **pharmaceutical** (medical or pharmaceutical products)
- c **electronics** (printed circuit boards, etc.)
- d **institutional** (money, clothing, etc.)



### Why should you vacuum pack?

- To reduce spoilage by removing air from the package resulting in much longer shelf life;
- To prevent dehydration;
- For ease of handling;
- To slow down oxidation;
- To protect against external contamination.

## Seal bars

## Machine dimensions

1 seal bar ..... 2 seal bars ..... 3 seal bars

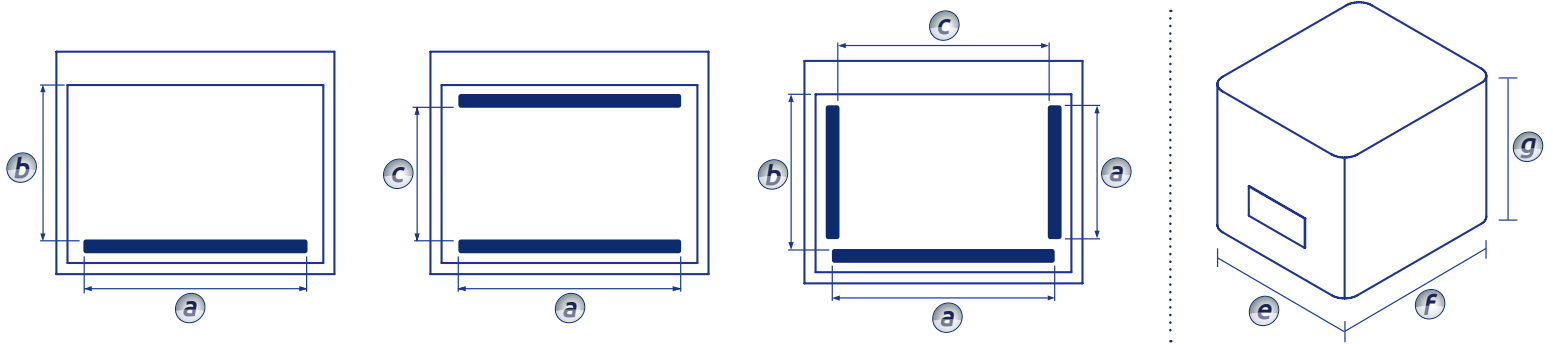


TABLE TOP MODELS			250	New* 300			300D	350	350D	380	380T
SEAL BARS	Lenght	<b>A</b>	12.5" / 319 mm	19.1" / 485 mm	19.1" / 485 mm	19.1" / 485 mm	19.1" / 485 mm	19.1" / 485 mm	12.5" / 319 mm	12.5" / 319 mm & 32.2" / 817 mm	
	Qty		<b>1</b>	<b>1</b>	<b>2</b>	<b>1</b>	<b>2</b>	<b>2</b>	<b>2</b>	<b>3</b>	
	Distance to back	<b>B</b>	13.1" / 333 mm	15.4" / 391 mm	N/A	15.4" / 391 mm	N/A	N/A	N/A	12" / 306 mm	
	Distance between	<b>C</b>	N/A	N/A	13.1" / 333 mm	N/A	13.1" / 333 mm	36.1" / 918 mm	36.1" / 918 mm	36.1" / 918 mm	
CHAMBER DIMENSIONS	Height		4" / 102 mm	6.8" / 172 mm	6.8" / 172 mm	6.8" / 172 mm	6.8" / 172 mm	6.8" / 172 mm	5" / 127 mm	5" / 127 mm	
BUSCH PUMP	Std / Option		4 m <sup>3</sup> / 0.1 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	20 m <sup>3</sup> / 0.9 kW	
MACHINE DIMENSIONS	Width	<b>E</b>	17" / 430 mm	23" / 585 mm	23" / 585 mm	23" / 585 mm	23" / 585 mm	23" / 585 mm	42.9" / 1,090 mm	42.9" / 1,090 mm	
	Depth	<b>F</b>	20.7" / 525 mm	23.7" / 602 mm	23.7" / 602 mm	23.7" / 602 mm	23.7" / 602 mm	23.7" / 602 mm	25.5" / 648 mm	25.5" / 648 mm	
	Height	<b>G</b>	17.2" / 436 mm	19.7" / 500 mm	19.7" / 500 mm	19.7" / 500 mm	19.7" / 500 mm	19.7" / 500 mm	19.2" / 487 mm	19.2" / 487 mm	
ELECTRICITY			120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	120 V / 1pH / 60 Hz	
MICROPROCESSOR			<b>MC-40</b>	<b>MC-05</b>	<b>MC-05</b>	<b>MC-40</b>	<b>MC-40</b>	<b>MC-40</b>	<b>MC-40</b>	<b>MC-40</b>	

\*In order to improve your productivity, the sealing bar for models 300/300D/350/350D is now 19.1 inches long instead of 17 inches.

### Basic Features:

- Single chamber
- Stainless steel construction
- Clear (see-through) lid
- Twin seal element
- Vacuum gauge
- Filler plates
- Cover latch
- ETL, CSA, UL certification (except model 300)

### Optional Features:

(Available on selected models)

- Vacuum sensor
- Electric cut-off
- Air regulator – Regulated air pressure in the seal bars bladders with compressed air
- Gas injection system (MAP)
- Stainless steel cart
- Multiple supply voltage available

All features are subject to change without notice.

### MC-05



### MC-40



Check out our other products by visiting our website:  
[www.sipromac.com](http://www.sipromac.com)

Phone: 819 395-5151 | Toll Free: 1 855 395-5252 Canada/U.S.  
 Email: [sipromac@sipromac.com](mailto:sipromac@sipromac.com)  
 240, boulevard Industriel, Saint-Germain-de-Grantham QC, Canada J0C 1K0

